
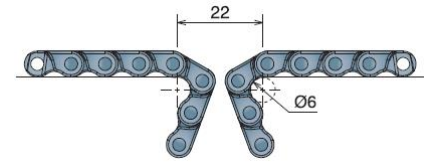
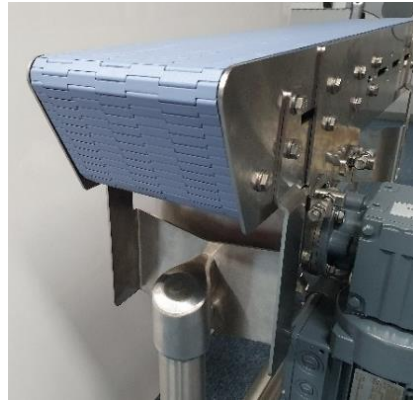


## Micropitch Conveyor Systems

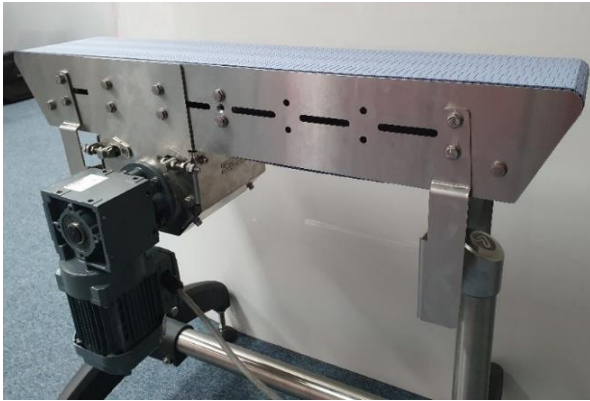

FlexCAM's range of Micropitch small nose transfer conveyors has been specifically designed for the smooth conveying and transferring of small delicate items. This specialised range eliminates the need for dead plates or transfer rollers minimising product damage and hang ups.

Application:	Delicate items of > 22mm diameter or products requiring smooth transfers
Recommended use:	<ul style="list-style-type: none"> <li>› Active transfer of products between processes</li> <li>› 90 degree transfer conveyor</li> <li>› Accumulation</li> </ul>
Industry applications:	Pharmaceutical, dairy, bakery, fried goods and confectionary
Benefits:	<ul style="list-style-type: none"> <li>› Minimised product damage and hang ups</li> <li>› Very low coefficient of friction making it ideal for accumulation</li> <li>› Smooth and active transfer of products</li> </ul>
Belt width:	<ul style="list-style-type: none"> <li>› 76mm, 152mm, 229mm, 305mm, 381mm, 457mm, 533mm and 610mm</li> <li>› Other widths available (up to 1220mm) if required</li> </ul>
Conveyor length:	<ul style="list-style-type: none"> <li>› Minimum length is 350mm</li> <li>› Lengths can be tailored to suit each individual application</li> </ul>
Specification:	The conveyor is supplied with an FDA approved 8mm pitch Acetal belt
Design features:	<ul style="list-style-type: none"> <li>› Fully washable with SS return rollers and UHMWPE top deck</li> <li>› FDA approved belt (LF Acetal -POM)</li> <li>› Intermediate drive, Bi-directional capability and fits within most space limits</li> <li>› Speeds up to 60m/min</li> <li>› Loads up to 3000N/m</li> <li>› Temperature range from -40 to +80 Deg C</li> <li>› Closed top SS support structure</li> <li>› SS Gearbox and motor available if required</li> <li>› Smooth and quiet operation</li> </ul>